

RGB tri-color LED source, available in IP20, IP64 and 67, uses UL94-V0 fire rated silicone protection.

SPECIFICATIONS

Voltage	24 VDC
Power	12W/m
LED quantity per meter	60 LEDs / m
LED type	SMD5060
Current regulator	-
Cutting	100 mm

DIMENSIONS IP20 VERSION

Width	10 mm
Thickness	2,5 mm
Length	5 m

DIMENSIONS IP54 VERSION

Width	10 mm
Thickness	3 mm
Length	5 m

DIMENSIONS IP67 VERSION


Width	12,5 mm
Thickness	4,5 mm
Length	5 m

K - IRC - lm/m.

LED551, IP20	RGB / 650lm
LED552, IP54	RGB / 650lm
LED553, IP67	RGB / 650lm

WARRANTY

5 years under normal conditions of use

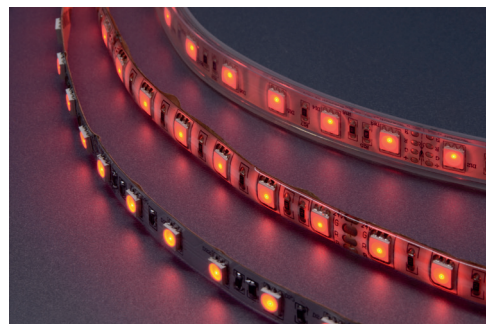

Compatible profiles

- PRO621
- PRO622
- PRO623
- PRO629
- TUBULAR PROFILE