OMEGA MICROTRACK STUCCHI

OMEGA is designed for multiple applications thanks to its interchangeable fixed or 20°-50° zoom lenses, its outgoing flux is 1100lm.

ELECTRICAL FEATURES

Voltage	24V to 48V DC non polarized
Power	13 W
Dimming control, 2 options	- Dimming using an integrated potentiometer, which can also accept the PWM dimming of the driver - Radiofrequency DMX dimming
Class	III

PHYSICAL FEATURES

Length	Fixed optic 78 mm / Zoom 82 mm
Diameter	Fixed optic 39 mm / Zoom 43 mm
Finish	Black, White

PHOTOMETRIC FEATURES

CRI / TM30	95+, rf 94
SDCM	2
K / lumen output	2300K / 1000lm
	2700K / 1020lm
	3000K / 1100lm
	3500K / 1140lm
	4000K / 1200lm

OPTICAL FEATURES

Material	PMMA
Interchangeable optics	FIXED : 18°, 24°, 36°, 60°, elliptical 20°-50°
	ZOOM 20° to 50°
Orientation	Vertical : 90° - Horizontal : 350°
Accessories	Snoot and cap

CERTIFICATION & WARRANTY

5 years under normal conditions of use
CE & ETL
IP20

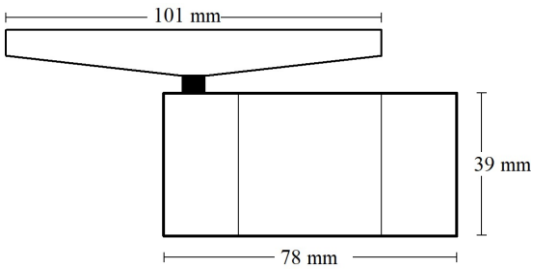

OMEGA fixed angle optic

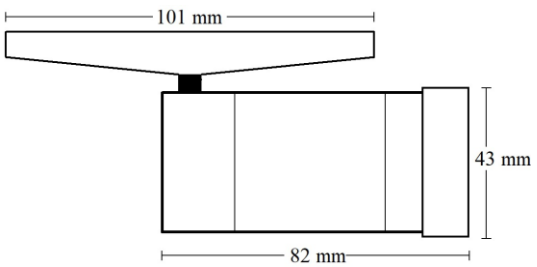

OMEGA zoom optic

OMEGA MICROTRACK STUCCHI

Reference Omega spot without optics

OME - MI - **X** - **X** – 95 - **X**

WH	White finish
BK	Black finish

23	2300K
27	2700K
30	3000K
35	3500K
40	4000K

P	Dimming using an integrated potentiometer, which can also accept the PWM dimming of the driver
D	Radiofrequency DMX dimming

Optics

White version	
SIG-OPT-18-WH	Optic 18°
SIG-OPT-24-WH	Optic 24°
SIG-OPT-36-WH	Optic 36°
SIG-OPT-60-WH	Optic 60°
SIG-OPT-EL2050-WH	Elliptical optic 20° x 50°
SIG-OPT-Z2050-WH	Zoom optic 20° - 50°

Black version	
SIG-OPT-18-BK	Optic 18°
SIG-OPT-24-BK	Optic 24°
SIG-OPT-36-BK	Optic 36°
SIG-OPT-60-BK	Optic 60°
SIG-OPT-EL2050-BK	Elliptical optic 20° x 50°
SIG-OPT-Z2050-BK	Zoom optic 20° - 50°

Cap to screw on the optic

SIG-CAS-WH	White version

SIG-CAS-BK	Black version

Snoot to screw on the optic

SIG-PAR-WH	White version

SIG-PAR-BK	Black version